STILE Choice By IHS Door Company

Doors Make the Difference



stilechoice.com

Just What You Want



et's cut to the chase: At IHS Door
Company we do one thing, and we do
it really well. We make MDF stile
and rail doors. Quality interior
doors, for home or commercial use. And
in a myriad of options: sticking, panels,
glass, size, whatever a customer wants.

That's STILEChoice[®]. Doors made right, to your design specs, and delivered quickly.

But it won't cost you an arm and a leg. Our doors are built to the highest construction standards, yet priced very competitively for a simple reason: This is all we make. We're invested in delivering precisely what a customer needs, not in costly inventory, marketing, or other overhead. The only thing we pass on to you is an exceptional door, made to your order.

Why should it be any more complicated?

We do quality.



Exceptional MDF stile and rail doors.

Made 100% in the USA, nothing imported.

So no waiting, no size or design limitations, and superior quality control.


STILEChoice® Doors are MDF stile and rail construction. STILEChoice® MDF is a 95% (or more) recycled material that delivers superior design advantages and finishing properties.

It's a less complicated, more versatile product, easily adapted to any design.



Door Designs

Throughout every step of our manufacturing we pay attention to even the smallest detail. From the clean fit of every joint to protecting your doors during shipping, we ensure you receive a quality product.

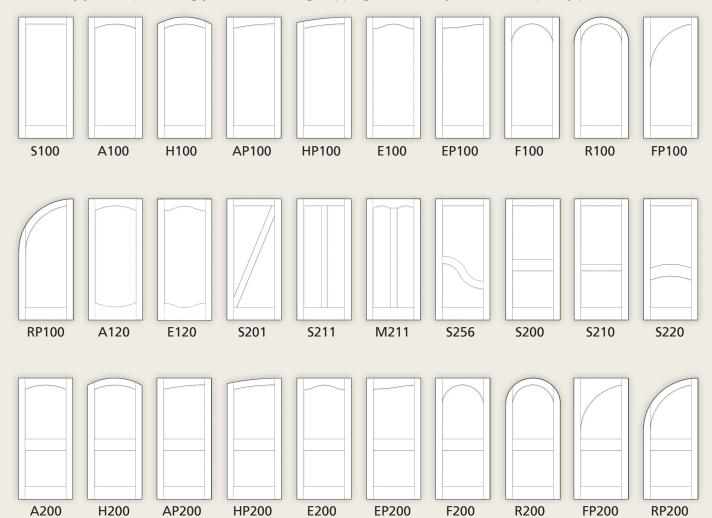



Many of our doors are available as common arch pairs.



These designs represent many of our standard offerings. If you can't find a design you'd like, show us your door and we'll match it.

We do options.


Our customers are not limited to what's standard. We will custom mix sticking and panel choices to your needs.

- With MDF, there's no limit on variety. Standard for us is custom in most books. We catalog more sticking and panel profiles than other manufacturers—and if we don't offer exactly what a customer wants, we'll create it for you. Need a custom rail width or door size? STILEChoice® means we'll provide exactly what you need for your project. Just ask and we'll quote it.
- We do custom True Divided Lite (TDL) glass doors—to match our sticking profiles.



4 | STILE Choice By IHS Door Company

Many of the doors are available as common arch pairs

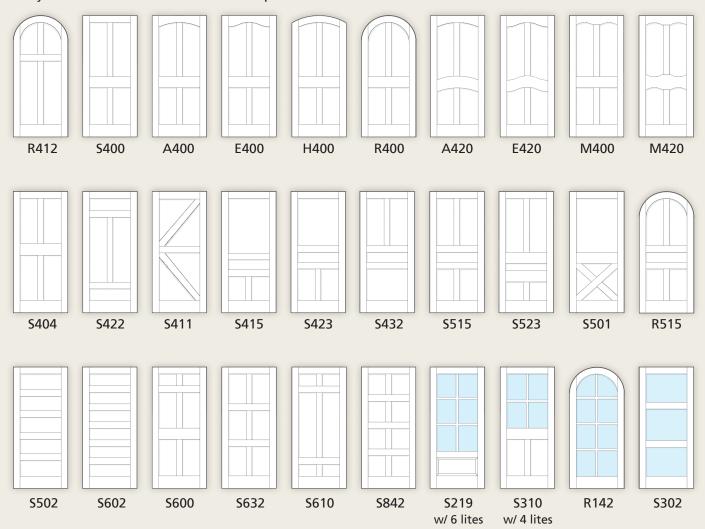

Don't see a style you like? Send us a sketch and we'll make it!

This is just a small sample of the many glass doors available

• We can add our standard chevron louvered door panels for an aesthetic effect to any architectural door. The chevron cross section provides ventilation while keeping light out and preserving privacy. Flat louvers are also available.



 STILEChoice® now offers a new and improved modern take on the classic "Miracle Door". More versions coming

soon.


"Miracle Door": a single flat panel in the center of the door surrounded by a perimeter of stepped moldings.



Stile, Rail & Panel Profiles

We offer a multitude of rail widths and sizes, sticking profiles, and panel options. You can get exactly what you need to match your project, and everything made to the same exacting standards.

Stile & Rail Sticking

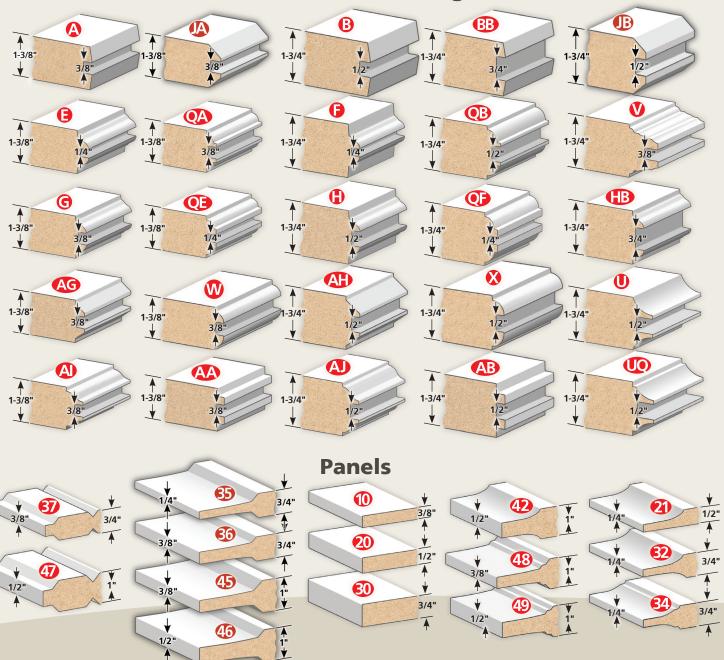

We keep it simple.


Because we only make one, exceptional product, we can be efficient, adaptive, and responsive to your needs. Big enough to do the job, small enough that we still hang our hat on personalized customer service.

Rail→ S200 Panel Stile Panel Panel Rail→

Specify the door you want

For example, choose:

Design.....S200
Stile & rail sticking.....AJ
Panel.....49
The order is S200-AJ49



Standard Designs

Over 100-Plus Matching Bifolds

Glass Doors

Complete your door package with glass doors

- All made to order with matching sticking profiles.
- True Divided Lite (TDL) whether you want a 2, 3, 4 or whatever.
- We can make it and it will match the rest of your doors.
- Full view

The MDF

STILEChoice

Advantage

hinge edge

- Mirror (full view one side and your design on the other side).
- Replace 1 or all panels in any of our door designs with glass.
- Clear Tempered, Frosted Tempered and White Laminated are common requests. Let us know if you need anything else.

Louvers

- Replace 1 or more panels in your door with a louver insert.
- Our standard is a hardwood chevron louver. Flat louvers are available as well.

Fire Rated

• Matched to non-rated doors.

Sustainable

- Recycled content: 95% (or more) of our MDF is recycled material.
- Primed with non-hazardous water-based primer.
- Renewable energy: wood residue from manufacturing is shipped to an electric generation plant.

Customization:

Custom heights, custom profiles (including matching your door)

• Up to 10' (over 8' only 1-3/4" doors available)

Custom widths

- Up to 6' single slabs
- Special designs allow virtually unlimited widths.

Custom design & specifications

- Panel and rail layout
- Stile & rail widths

Custom profiles

- We will match your sticking and panel.
- Send us a door and we will match it!

Specifications:

op controller.				
	Standard Bifolds	Residential	Residential	Commercial
Thickness	1-3/8"	1-3/8"	1-3/4"	1-3/4"
Standard Sticking Choices	10	10	16	16
Top Rail	4-1/2"	4-1/2"	4-13/16"	5-7/8"
Cross Rail/Mullions	4"	4"	4"	4"
Lock Rail	7-3/8"	7-3/8"	7-3/8"	7-3/8"
Bottom Rail	7-1/2"	8-1/2"	8-1/2"	11-1/2"
Bifold Stile	2-1/4"			
Stile (Doors 1/6 and Wider)		4-1/2"	4-13/16"	5-7/8"
Stile (Doors less than 1/6 wide)		3-5/8"	3-5/8"	3-5/8"
Standard Doors under 2/0 wide		no mullions	no mullions	no mullions
Standard Heights	6/7	6/8, 7/0, 7/6, 8/0,	6/8, 7/0, 7/6, 8/0 8/6, 9/0, 9/6, 10/0	6/8, 7/0, 7/6, 8/0 8/6, 9/0, 9/6, 10/0
Custom Maximum Height	8/0	8/0	10/0	10/0
Standard Widths	2/0, 2/6 and 3/0	1/0 – 4/0 in 1" increments	1/0 – 4/0 in 1" increments	1/0 – 4/0 in 1" increments

These doors are built to perform. We call it the STILEChoice® Advantage.

• Part One: The MDF hinge edge is inserted at 90°. This provides a sturdy mounting plane for hardware, an edge that won't split like

wood. Talk is cheap, so in an independent slam test, our doors performed over 519,000 slams (which exceeds the commercial Heavy Duty standard) before we stopped the test.

• Part Two: We use a square sticking profile that isn't quite 90°. This simple design enhancement offers substantial performance advantages. Though not obvious to the casual eye, you'll be amazed at how this profile eases finishing and cleaning, yet achieves a classic look.

The STILEChoice® Advantage

STILEChoice 7

844-IHS-DOOR (447-3667) • 715-392-8102 • stilechoice.com

Handling and Finishing

Improper handling will void the warranty for warp.

Handling: Doors should not be delivered to the job site until all other trades are complete and concrete floors, plaster and drywall are completely dry.

Doors should be stored flat in a dry, well ventilated area. The doors should not be placed directly on the floor, but placed on at least three equally spaced supports (2x4 or similar). DO NOT LEAN DOORS up against the wall (doing so will void any warranty for warp).

Finishing: To properly finish the door use a high quality paint and apply it in strict accordance with the manufacturers specifications.

Be sure to patch any minor dents or scratches that have occurred during handling. Do any required final sanding and be sure to wipe the door clean before applying any paint.

Doors are to be finished on both sides and all four edges. Do not leave one side

unfinished for a prolonged period of time; when finishing the doors both sides should be finished at the same time. Prolonged time between finishing the 2 faces of the door can lead to warping and void warranty for warp.


IMPORTANT!

Pre-drilling and Screw Information:

Use the same size screws that would be appropriate for the size and weight of the door.


Pre-drilling and Tightening: Pilot holes are required and should be between 85% to 90% of the root-diameter of the selected screw and drilled to a depth greater than the screws driven length. Screws should not be overtightened — set the clutch on your drill to minimum.

Hinges: Use 3 hinges on 6'8" and 7'0" doors, and 4 hinges on 7'6" and 8'0".



Improper handling of doors may void any warranty for warp.

2 years for manufacturing defects. Visit **stilechoice.com** to view the full warranty, download a PDF or contact your supplier for a copy.



We make a wide range of specialty

doors for interior locations and

applications to allow you to

complete your home

with matching doors.


Here are a few

examples:

STILE Choice By IHS Door Company

IHS Door Company 1505 North 8th Street Superior, WI 54880

715-392-8102 main 715-392-8128 Fax sales@ihsdoor.com



DISTRIBUTED BY:


STILE Choice By IHS Door Company

Doors Make the Difference



Router Carved Doors stilechoice.com

Router Carved Door Designs

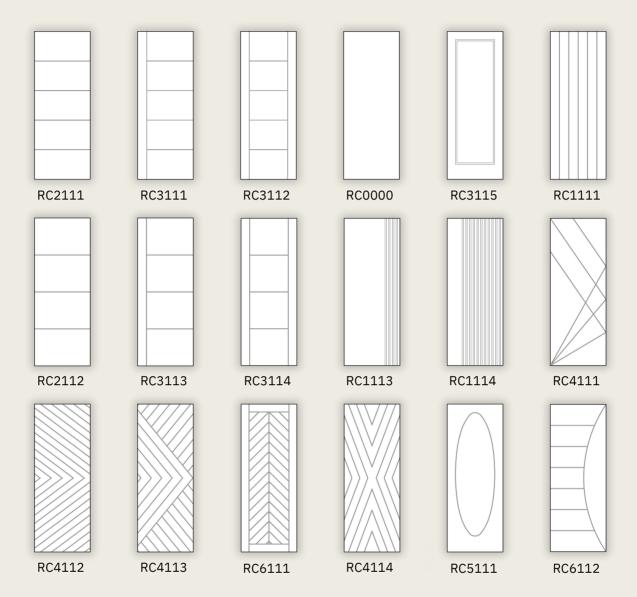




Infinite Router Carved Possibilities

Our router-carved door designs are just the beginning of what we can achieve. We have the capability to recreate almost any router-carved door. Simply send us a photo or a sketch, and we will collaborate with you to bring your vision to fruition.

844-IHS-DOOR (447-3667) • 715-392-8102 • stilechoice.com



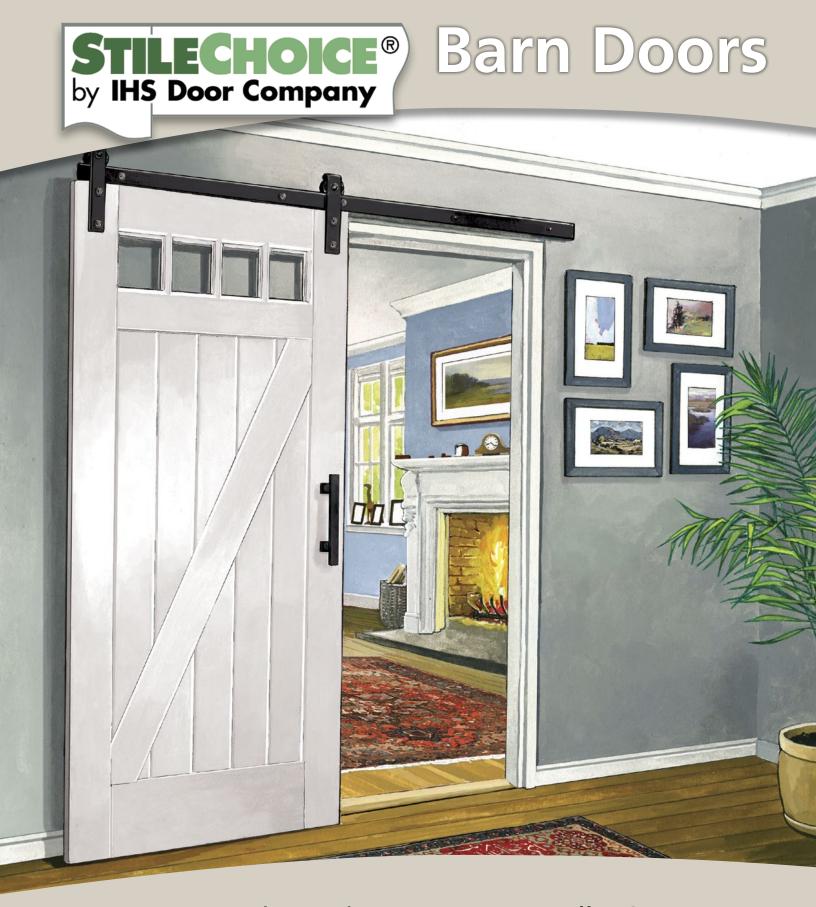

We've enhanced our Barn Door Collection with the new Barn Door Specification

Introducing the STILEChoice® Barn Door Specification

Although you can order any of our barn door designs using standard specifications, STILEChoice® now offers our new Barn Door specification. This new specification compliments the large Barn Doors people desire today.

Here's how it works:

We can make a door in any size you need, so you can order a door that properly fits your opening. Depending on your casing width, you would likely want to order a Barn Door 6" wider and 3" taller


than your finished opening. Using the Barn Door Specification, the door — when viewed from the opposite side, in the closed position — the stiles and rails will look normal and proportional, rather than too narrow.





STILEChoice® Barn Door Specification as viewed from the opposite side.



















are profile **B47**


Flat panel doors shown are profile


This is a small













STILEChoice® Barn Door Specification

 900 series doors are profile B80


Send us a sketch and we'll make it!


We offer Barn Doors in nearly any size. You can get exactly what you need to match your project.

- Stiles and Top Rail: 73/8"
- Lock Rail: 7³/₈"
- Cross Rails: 5 7/8"
- Bottom Rail: 11½"











1505 North 8th Street
Superior, WI 54880
715-392-8102 main • 715-392-8128 Fax • sales@ihsdoor.com • ihsdoor.com
Our doors are proudly manufactured in the U.S.

DISTRIBUTED BY: